

handling-short instruction for

Flash-Prommer-II Flash-Prommer-II-MMC V1.4



Interface-Overview:

Connectors:

RS232:

The 9pin female Connector has following pining:

Pin	short name	Description
2	TxD	Sender Flash-Prommer II
3	RxD	Receiver Flash-Prommer II
5	GND	Signalground
7	CTS	Clear to Send (not used)
8	RTS	Request to Send (not used)

Power Supply:

The Flash – Prommer II needs a power supply of 24V DC with a tolerance of $\pm 20\%$. The used current is 200mA.

The pining of the power supply-connector is from left to right:



+24VDV PE 0V

PE must be always connected!

Light emitting diode:

The Flash – Prommer II shows the user the operating state with one LED:

Standby:	flashing the LED all 4 Seconds
Access to Card:	statically on
Error:	flashing the LED 2 times per second

Memory-modules:

The most Flash - Cards for Siemens-PLC's could be used:

951-0K*00 and 951-1K*00
952-0K*00 and 952-1K*00
374-1F*00 and 374-2F*00
374-1K*00 and 374-2K*00

the **Flash-Prommer (MMC) II** could additionally use the new Siemens MMC-Cards:

953-8L*00 and 953-8L*10
953-8L*11

Software-installation:

Please download from the product-page of your device the WinPromm-software and install it on your PC.

Menu-structure:

File	New
	Open
	Save
	Save As
	Printer configuration
	Exit
View	Toolbar
	Status line
Module	Select
	Read
	Write
	Blanktest
	Compare
	Block list
	Erase
Configuration	Interface
	Language
	Word/Block
	SYSID
	Display checksum
Window	Overlapped
	Side-by-side
	Top-on-top
	Group symbols

Help

- Contents
- Usage of help
- Introduction
- Version-history
- About WinPrommer

Block

- All
- None
- Exchange

File-formats:

.	All Files. It is tried to choose a file-format according the extension. If no appropriate file-format is found, the binary format is used
*.BIN	Binary File
*.S5D	Step-5 File
*.S7P	Step-7 File (structure)
*.308	ET-100 File
*ET.200	ET-200 File
*.2BF	ET2-Binary Export
*.HEX	Intel-Hex-Format
*.EPR	Motorola-Hex-Format
*.525	CP-525/524 Files
Q*.*	CP-5431 File
A*.*	CP-1430/CP-143 File

Please note, the **32-Bit-version** only provides **binary**-files, **S7P**- and **S5D**-files.

Technical data:

Size (S x H x D):	78 x 35 x 128mm
Case-Type:	metal casing, powder-coated

For more Information of the Flash-Prommer-II-MMC or to get the actual Manual or the actual operating software WinPrommer, you find the information under

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Copyright by PI 2003 - 2025


Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + Memory modules / Prommer
 - + FLASH-PROMMER-II-MMC



Please make sure to update your drivers before using our products.

Serial programming of the S7- PLC

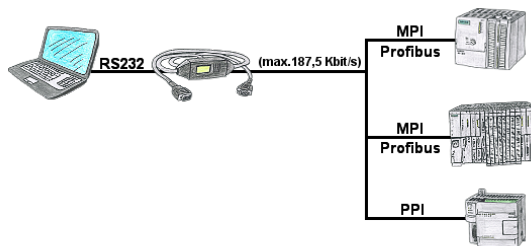

With the MPI/PPI-cable you have the ability to access a connected SPC-PLC S7-200 (PPI 9600 Baud and 19200 Baud) as well as S7-300/400 (MPI/Profibus 9600 Baud up to 187500 Baud) via PC serial with up to 115200 Baud for reading respectively writing of data.