Operation Quick Start Guide V1.0 for

S5/S7-TimeServer - EUROPE
S5/S7-TimeServer - WORLD

This page contains the **brief instructions** for the **S5/S7-TimeServer-devices**. Here you will find an overview of the various components on the front and back, basic hardware installation, initial login information, device specifications and general safety instructions. It is highly recommended that you familiarize yourself with the quick start guide before using the device. If you have a CONNECT-CONTROL-device, you will also find a printed version of the quick start guide in the device packaging or online on the device's product page.
The only difference between the devices is the used built-in LTE modem. The Europe variant can only be used in Europe, the World variant anywhere in the world.

Connections:
Frontside:

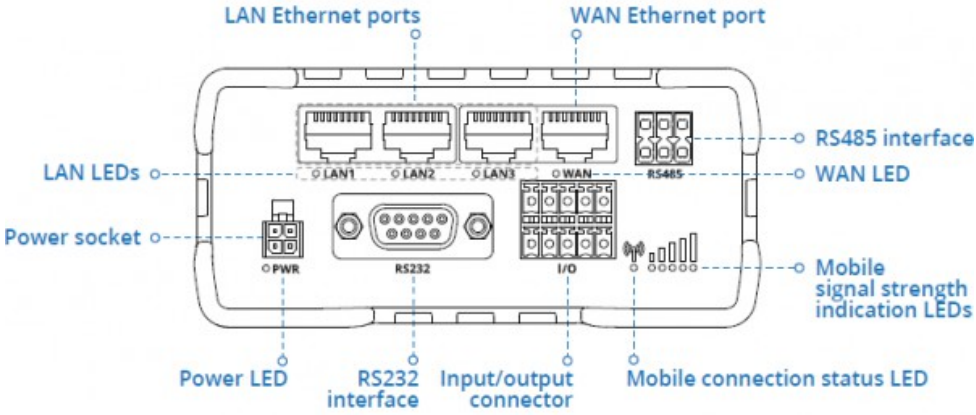

Backside:

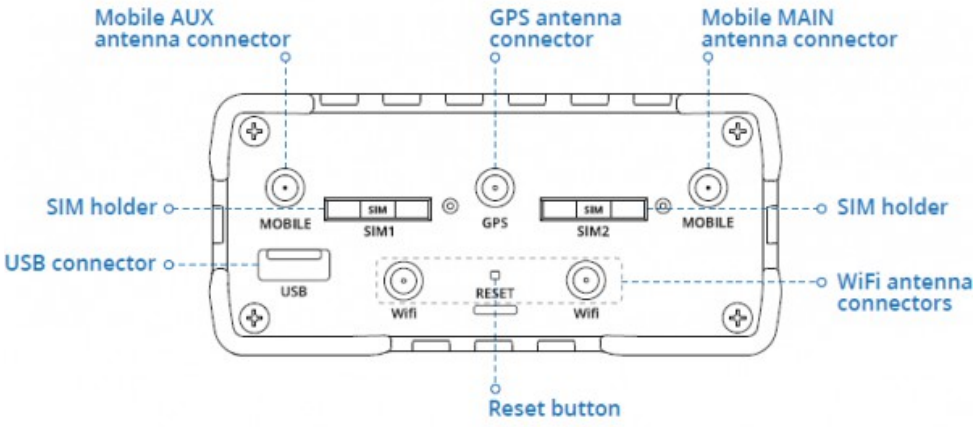

Power connector:

No	**Description**	**Wire-color**
1	+9 – 30V DC	Red
2	0V	Black
3	E/A	Green
4	E/A	White

Hardware-installation

1.) Attach WiFi and GPS antennas (WLAN antenna only if access is to take place via WLAN)
2.) Connect the power adapter to the power socket located on the front panel of the device. Then plug the other end of the power adapter into a power outlet.
3.) Connect to the CONNECT-CONTROL-device wirelessly or use an Ethernet cable.
The associated WIFI SSID and password are located on the underside of the device.

Computer-configuration (Windows):

1.) Enable the wireless network connection (go to **Start → Control Panel → Network and Internet → Network and Sharing Center**. In the left panel click the **Change adapter settings** link. Right click on **Wireless Network Connection** and select **Enable**).

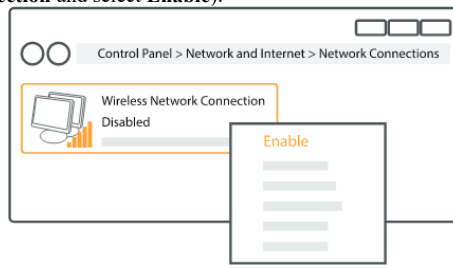

2.) Setup wireless network adapter on your computer (right click on **Wireless Network Connection** and select **Properties**. After that select **Internet Protocol Version 4 (TCP/IP)** and click **Properties**).
3.) Select **Obtain IP address** and **Obtain DNS server address automatically** if they are not selected. Click **OK**.

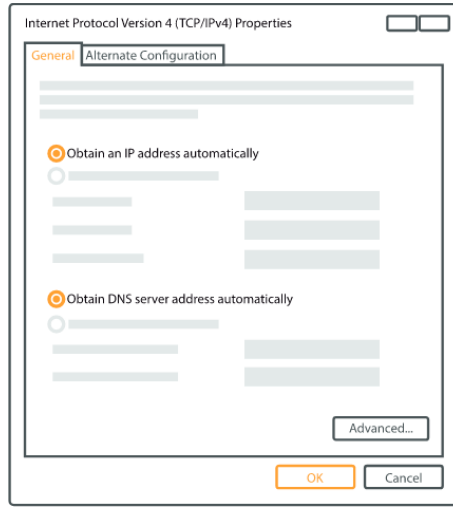

4.) Right click on **Wireless Network Connection** and select **Connect** to see available wireless networks.

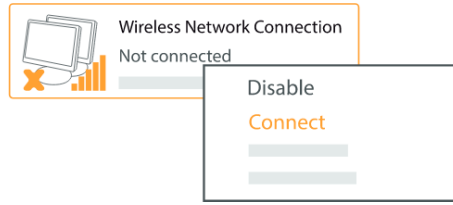

5.) Choose the wireless network **RUT955_****** from the list and click **Connect**. Enter the WiFi password located on the device's label

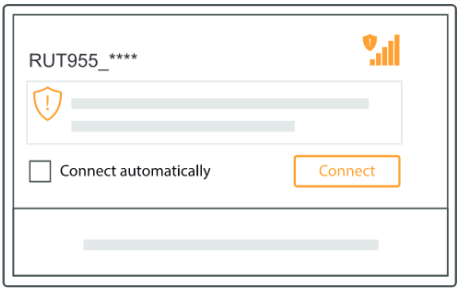

Commissioning:

- Connect laptop to this WiFi network or LAN-cable in one of the 3 LAN-port and open with browser webserver with IP: http://192.168.1.1



The navigation is done by clicking on the navigation-symbol ( ).

The WLAN parameters and the IP address of the S5 / S7 TimeServer can be adjusted in the configuration menu. The integrated NTP server for network devices can also be switched on and off.

Create a PLC station to set the time:

Click on the navigation symbol in the web interface and then on "Station". In the menu that is now open, you can see the stations that have already been created and you can add more by clicking on "Add station".

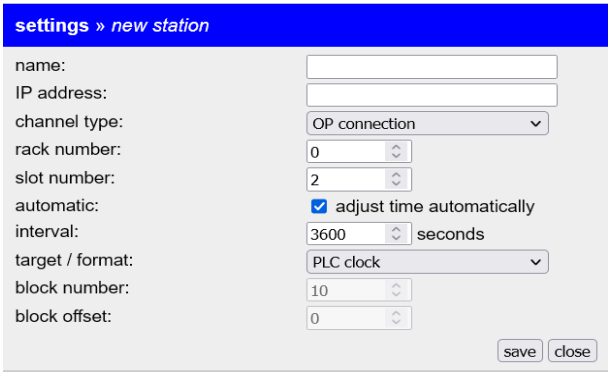

Parameter:

name:	Name of this connection		
IP address:	IP address of S7-PLC (or S7-LAN-module or S5-LAN++)		
chanel-type:	OP-, PG-, or unspecific connection (depending on which connection is free in the HW-Config of an S7-PLC)		
rack number:	Rack number of S7-PLC (usually 0)		
slot number:	Slot number of CPU-assembly, usually slot 2 (for S7-400 with wide power-supply slot 3)		
automatic:	If activated, the time is updated according to the interval-information in the PLC		
interval:	Time-interval in which the time is automatically updated when automatic is selected		
target / format:	PLC-clock:	write the time directly to the PLC (only S7-300/400)	
	DB S7 Date_and_Time:	time in DB in Date_and_Time-format	
	DB S7 LDT:	S7-1500: time in DB in LDT-format	
	DB S7 DTL:	S7-1x00: time in DB in DTL-format	
	DB binary:	time in DB, binary	
		Year:	word
		Month:	byte [1...12]
		Day:	byte [1...31]
		Weekday:	byte [0...6]
		Hour:	byte [0...23]
		Minute:	byte [0...59]
		Second:	byte [0...59]
		Sommer time:	byte [0...1]
		Updated:	byte [0...1]
	DB ASCII:	time in DB, ASCII	
		Year:	4 Char
		Month:	2 Char
		Day:	2 Char
		Hour:	2 Char
		Minute:	2 Char
		Second:	2 Char
		Sommer time:	Byte [0...1]
		Updated:	Byte [0...1]
block number:	for DB-parameter number of data-block		
block offset:	for DB-parameter offset of time-information		

With „save“ the entry is accepted and the entry is completed , with „close“ without saving the window closed.

In the overview you can see the defined stations:

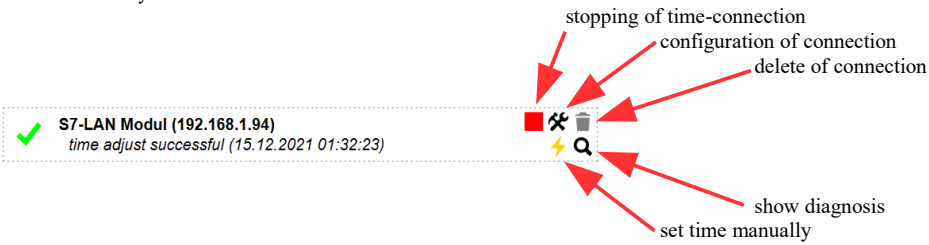

Stations with a light gray background are stopped, no time is updated here:



More about this product can be found in the download area on the product page.

Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Copyright by PI 2021 - 2026

Menutree Website:

+ Products / docu / downloads
  + Hardware
    + Time
      + S5/S7-TimeServer

QR-Code Website:

Please make sure to update your drivers before using our products.

Without LAN-cable round of the PLC

Your're right in the middle of your production line and and should move around the machine and simultaneously observe / manage. No problem, you parameterize the ALF, connect to the S7-LAN and connect to the WIFI-network of the ALF and are ONLINE on the PLC.

Profinet life cycle monitoring and alarming



Identify impending failures in your Profinet.
Creeping aging will be displayed to you very detailed.
The Profinet-Watchdog give you the change to react before something happens.

Analyzing of write-/read-accesses to the PLC

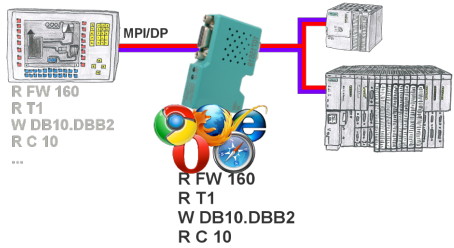

Panel of S7 SPS, no backup of the project or the projecting-data itself?
Put the MPI/DP-bus-communication-analyzer on the bus of the respective control, set the bus-address of the control via the web-interface and start the recording. After stop visible list in the web-interface of all read or written data-areas I/O/F/T/C/DW of the control.
Filter functions for source-address as well as source- and target-SAP.

Wireless around the Mitsubishi-PLC

Move wirelessly around the Mitsubishi-PLC and communicate for example ONLINE in the status