

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + PD-interface-multiplexer
 - + T-Connector to PPI/MPI-Bus



QR-Code Website:



Please make sure to update your drivers before using our products.

Informations about the bus

S7-LAN V2.63
Kuehlhaus_1
IP:192.168.1.56

- Startseite
- Verbindungen
- Display
- Module
- Konfiguration
- Zugriffsrechte
- Passwort
- Neustart

RPC1006-Verbindungen - MPI

ID	IP-Adresse	Quali TSNP	Zeit TSNP	CPU	Busstatus	Paralle
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0

Gateway-Verbindungen

ID	KnotenID	Eingangsmodus	Extraktionsmodus
1

Busknotenmatrix

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1																				
2																				
3																				
4																				
5																				
6																				
7																				
8																				
9																				
10																				
11																				
12																				
13																				
14																				
15																				
16																				
17																				
18																				
19																				
20																				

Zustand


Busknotenmatrix	verfügen
Busknoten	verfügen
Ordnung Subknoten	2
Modulbezeichnung	...

Copyright © 2007

View information from the connected bus-system in plain text without using the Simatic-Manager or TIA-Portal. With the connection-menu you get the list of reachable nodes, marked in color whether it is an "active bus-participant", is a "candidate for inclusion in the bus" or a "passive bus-participant".


You can also see whether cyclic bus-parameter-protocols have been received, you are "in the bus" yourself, the bus-address of the participant recognized as a "direct participant" (on which the S7-LAN is located) and whether the contained modules such as "variable control", "gateway-coupling",... actively communicate.

Linking of S5-PLC's without modifying the PLC-program

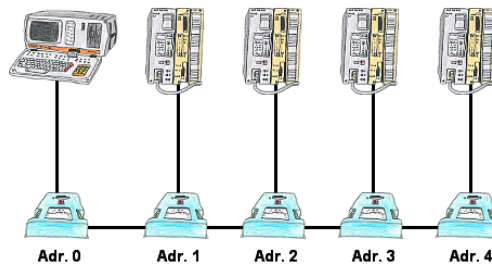

You have to link several S5-PLC's so that in case of need you can respond to all of them without modifying the PLC-program? No problem, connect all PLC's that are in the run with the IBX-Klemme, set up the respective address (1 to 30) at the IBX-Klemme and with the address 0 you will be able to respond to all PLC's via PD-bus-path selection.

Data backup S7-PLC over MPI/Profibus on SD-card via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to SD-card

Wireless around the Eaton-PLC




Move wirelessly around the Eaton-PLC and communicate for example ONLINE in the status

Data backup S5-PLC on FTP-server via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via PG-socket and Ethernet to FTP-server

EtherSens-cloud

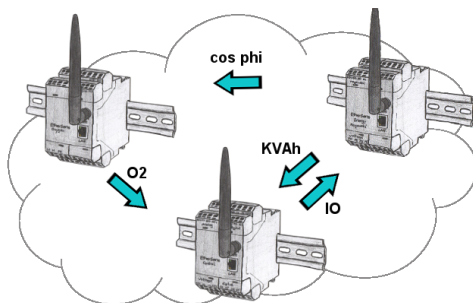

By the EtherSens-cloud each EtherSens-device can exchange data, transfer data and forward to other devices. As if you use one device that records all necessary parameters centrally.