handling-short instruction
for
Multi– Prommer V1.3



Interface-Overview:

Front-Side:

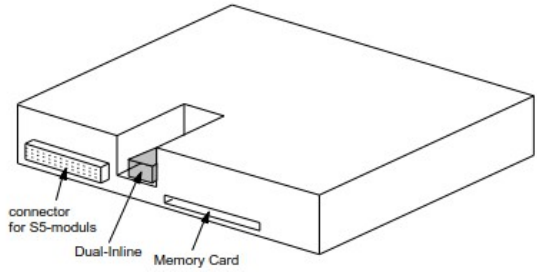

Back-Side:

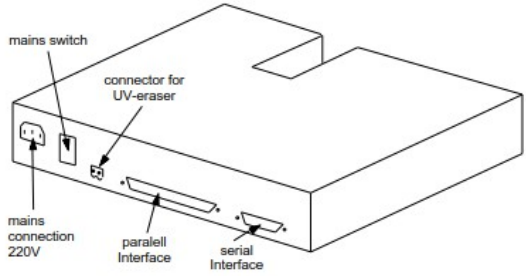

Connectors:

RS232:
The 9pin female Connector has following pining:

Pin	short name	Description
2	RxD	receiver PC-side
3	TxD	transmit PC-side
5	GND	ground signal
7	RTS	request to send
8	CTS	clear to send

Parallel-Interface:

Pin	short name	Description
1	ACK	acknowledged
2	D0	data bit 0
3	D1	data bit 1
4	D2	data bit 2
5	D3	data bit 3
6	D4	data bit 4
7	D5	data bit 5
8	D6	data bit 6
9	D7	data bit 7
10	STB	strobe
11	INIT	initialize
12	AFD	append auto-form-feed
13	SLIN	selection input
14	PE	paper empty
15	ERR	error
16	BUSY	busy
17	SLCT	select
18 – 25	GND	ground signal

Power Supply:
The Multi–Prommer needs a power supply of 230V AC with a tolerance of ±15%. The connection should be made with the delivered cable. The Multi-Prommer is also reachable with 115V AC, ask your dealer.

Software-installation:
Download the WinPromm-software from the mentioned website and start the installation. Follow the Install-Shield.

Menu-structure:

File
- New
- Open
- Save
- Save As
- Printer configuration
- Exit

View
- Toolbar
- Status line

Module
- Select
- Read
- Write
- Write too
- Blanktest
- Compare
- Block list
- Erase

Configuration
- Interface
- Language
- Word/Block
- SYSID
- Display checksum

Window
- Overlapped
- Side-by-side
- Top-on-top
- Group symbols

Help
- Contents
- Usage of help
- Introduction
- Version-history
- About WinPrommer

Block
- All
- None
- Exchange

File-formats:

.	All Files. It is tried to choose a file-format according the extention. If no appropriate file-format is found, the binary format is used
*.BIN	Binary File
*.S5D	Step-5 File
*.S7P	Step-7 File (structure)
*.308	ET-100 File
*ET.200	ET-200 File
*.2BF	ET2-Binary Export
*.HEX	Intel-Hex-Format
*.EPR	Motorola-Hex-Format
*.525	CP-525/524 Files
Q*.*	CP-5431 File
A*.*	CP-1430/CP-143 File

Technical data:

Size (S x H x D):	245 x 47 x 187mm
Case-Type:	metal casing, powder-coated

For more Information of the Multi–Prommer or to get the actual Manual or the actual operating software WinPrommer, you find the information under

Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Copyright by PI 2003 - 2026

Menutree Website:

+ Products / docu / downloads
  + Hardware
    + Memory modules / Prommer
      + MULTI-PROMMER

QR-Code Website:

Please make sure to update your drivers before using our products.

Remote-maintenance Siemens-S5-PLC with firewall

Remote-maintenance of a Siemens-S5-controller with S5-LAN++ on PD-port via secure VPN-tunnel and scalable firewall