

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.  
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

**Menutree Website:**

- + Products / docu / downloads
- + Accessories
- + Connector / Power supply
- + Connector 2pins big




**QR-Code Website:**




Please make sure to update your drivers before using our products.

## Data logging of your PLC




You shortly need a logging of your PLC's operating states respectively are on the way of figuring out a problem and have no datalogger? No problem, connect the PC, start the PG-2000-software with "option datalogger", define relevant variables, appoint timestamp and then the recording starts running immediately. The data will be stored on the fixed disc according to the configuration.

## Wireless around the Allen-Bradley-PLC



Move wirelessly around the Allen-Bradley-PLC and communicate for example ONLINE in the status

## EtherSens-cloud

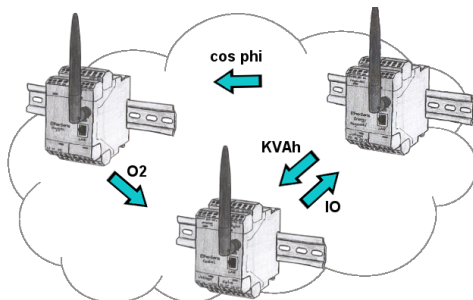

By the EtherSens-cloud each EtherSens-device can exchange data, transfer data and forward to other devices. As if you use one device that records all necessary parameters centrally.

## To switch a MESSI-output via SMS



SMS-Versenden.  
PASS=12345 DO1=1,16

```
PASS=12345 DO1=1,16
| | | | | 15 Sekunden Schaltzeit (0 bedeutet dauernd an)
| | | | | 1 = EIN, 2 = AUS (Bei AUS wird keine Schaltzeit beachtet)
| | | | | DO1 Schaltezeit für Digitalausgang (DO1 bis DO8 möglich)
| | | | | Passwort aus dem Messpunkt Gerätezugang
| | | | | Schlüsselwort für Passwort
```


Switching an output via SMS is an integrated function of the MESSI. Herewith the switching operation will be secure and comprehensible from afar.

## Wireless around the Beckhoff-PLC



Move wirelessly around the Beckhoff-PLC and communicate for example ONLINE in the status

## Analyzing of write-/read-accesses to the PLC

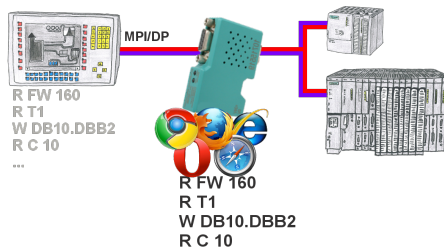

Panel of S7 SPS, no backup of the project or the projecting-data itself?

Put the MPI/DP-bus-communication-analyzer on the bus of the respective control, set the bus-address of the control via the web-interface and start the recording. After stop visible list in the web-interface of all read or written data-areas I/O/F/T/C/DW of the control.

Filter functions for source-address as well as source- and target-SAP.