

## Handling-Shortinstruction for MPI/DP-bus-communication-analyzer



### MPI/DP-bus-communication-analyzer 9352-BUS-SCAN for Simatic S7-300 up to S7-400


The module will be connected direct to the mpi/profibus-port of the S7-plc. The connection of the RJ-45-port will be the same connecting a PC to the network. This module don't use a integrated keyboard so the configuration will be done with the integrated webserver. For this action, you connect the PC and this module via network and write down in the browser the ip-address of MPI/DP-bus-communication-analyzer <http://192.168.1.56> (default address). Now, you are possible to change the configuration and the ip-address, also.

Please install after this the tool „TIC“ (see link to homepage) on your PC. With the help of this tool you can import any firmware updates or parameterize the device.

### Connection of the external +24V

The external power supply of the The external supply of +24V DC is done via the integrated Phoenix jack . The external power supply voltage may exceed the value of +24 V DC  $\pm$  20% not covered or exceed. The maximum current is 85mA.

The correct pinning of the connector is:

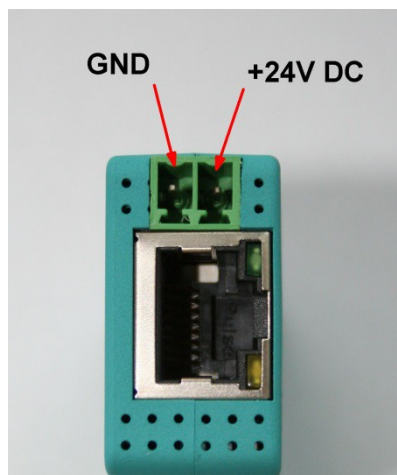

Before using the external supply, check the assignment of the Phoenix connector! The module itself is protected against polarity reversal, but this cannot be guaranteed if it is attached to another module.

Configuration-menu:

General

Name:

Factory settings:

Load now

Network

Use DHCP:

☐

IP address:

192.168.1.38

Subnet mask:

255.255.255.0

Gateway Address:

0.0.0.0

Send Gratuitous ARP:

☒

Bus configuration

Configuration:

from bus

MPI / Profibus

Local subscriber address:

2

Save

The MPI / DP bus communication analyzer only needs to enter the bus address of the participant whose communication is to be monitored. This is done in the "Observation target address" menu. Otherwise, the bus to be monitored and the network settings are specified here. You can also assign a device name. This is then also visible in the TIC if you are using several devices in the same network.

As soon as this configuration is saved, this communication can be observed in the “Record” menu.

configuration

recording:

start recording

protocol table:

clear table

view filter:

reset filter

filter settings

source address (SA):

source SAP (SSAP):

destination SAP (DSAP):

read / write variables:

☐ only these protocols

protocol table

SA	DA	SSAP	DSAP	Type	Description
No protocols were recorded yet!					

protocol details

Please select a protocol from the table for more details!

The recording is started with "start recording". Similarly, the stop button "stop recording". "Clear table" deletes the log table for a recording. The same can be achieved by leaving the menu and reopening it.

"Reset filter" resets the filter settings to the factory settings.

Possible filter settings:

- source address (SA): Filtering according to the sender address of the protocols
- source SAP (SSAP): Filtering according to SSAP of a communication
- destination SAP (DSAP): Filtering according to DSAP of a communication
- variables read/write: Only shows logs that read / write data

All recorded communication protocols are shown in the protocol table. By clicking on a protocol you get a list of this special protocol in the protocol details.

You can find more about the working method, current firmware versions and the device manual on the product page of the device.

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

Copyright by PI 2020 - 2025

### Menutree Website:


- + Products / docu / downloads
- + Hardware
  - + Analysis technic
  - + MPI/DP-bus-communication-analyzer



MPI/DP-SCAN (1.1)		Webbrowser	P: 10.10.10.1
1. Scan-Modul			
2. Scan-Modul			
3. Scan-Modul			
4. Scan-Modul			
5. Scan-Modul			
6. Scan-Modul			
7. Scan-Modul			
8. Scan-Modul			
9. Scan-Modul			
10. Scan-Modul			
11. Scan-Modul			
12. Scan-Modul			
13. Scan-Modul			
14. Scan-Modul			
15. Scan-Modul			
16. Scan-Modul			
17. Scan-Modul			
18. Scan-Modul			
19. Scan-Modul			
20. Scan-Modul			
21. Scan-Modul			
22. Scan-Modul			
23. Scan-Modul			
24. Scan-Modul			
25. Scan-Modul			
26. Scan-Modul			
27. Scan-Modul			
28. Scan-Modul			
29. Scan-Modul			
30. Scan-Modul			
31. Scan-Modul			
32. Scan-Modul			
33. Scan-Modul			
34. Scan-Modul			
35. Scan-Modul			
36. Scan-Modul			
37. Scan-Modul			
38. Scan-Modul			
39. Scan-Modul			
40. Scan-Modul			
41. Scan-Modul			
42. Scan-Modul			
43. Scan-Modul			
44. Scan-Modul			
45. Scan-Modul			
46. Scan-Modul			
47. Scan-Modul			
48. Scan-Modul			
49. Scan-Modul			
50. Scan-Modul			
51. Scan-Modul			
52. Scan-Modul			
53. Scan-Modul			
54. Scan-Modul			
55. Scan-Modul			
56. Scan-Modul			
57. Scan-Modul			
58. Scan-Modul			
59. Scan-Modul			
60. Scan-Modul			
61. Scan-Modul			
62. Scan-Modul			
63. Scan-Modul			
64. Scan-Modul			
65. Scan-Modul			
66. Scan-Modul			
67. Scan-Modul			
68. Scan-Modul			
69. Scan-Modul			
70. Scan-Modul			
71. Scan-Modul			
72. Scan-Modul			
73. Scan-Modul			
74. Scan-Modul			
75. Scan-Modul			
76. Scan-Modul			
77. Scan-Modul			
78. Scan-Modul			
79. Scan-Modul			
80. Scan-Modul			
81. Scan-Modul			
82. Scan-Modul			
83. Scan-Modul			
84. Scan-Modul			
85. Scan-Modul			
86. Scan-Modul			
87. Scan-Modul			
88. Scan-Modul			
89. Scan-Modul			
90. Scan-Modul			
91. Scan-Modul			
92. Scan-Modul			
93. Scan-Modul			
94. Scan-Modul			
95. Scan-Modul			
96. Scan-Modul			
97. Scan-Modul			
98. Scan-Modul			
99. Scan-Modul			
100. Scan-Modul			

Please make sure to update your drivers before using our products.

### Setting the PLC time



Summer-/winter-time switching, yet this buzzword is one term. Always in March and October the problem of time-change to the PLCs of their plant(s). Capture the controllers in the "S7-PLC exact time synchronization"-tool and automates setting the time in the controllers.

No change on the PLC-program necessary!

Whether MPI/Profibus via S7-LAN or Profinet!