



handling-short instruction for Multi- Prommer V1.3




Interface-Overview:

Front-Side:

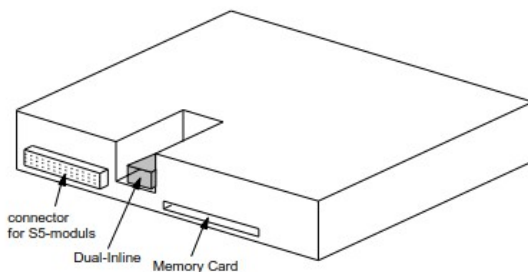

Back-Side:

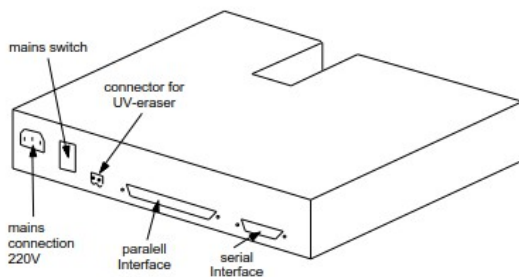

Connectors:

RS232:

The 9pin female Connector has following pining:

Pin	short name	Description
2	RxD	receiver PC-side
3	TxD	transmit PC-side
5	GND	ground signal
7	RTS	request to send
8	CTS	clear to send

Parallel-Interface:

Pin	short name	Description
1	ACK	acknowledged
2	D0	data bit 0
3	D1	data bit 1
4	D2	data bit 2
5	D3	data bit 3
6	D4	data bit 4
7	D5	data bit 5
8	D6	data bit 6
9	D7	data bit 7
10	STB	strobe
11	INIT	initialize
12	AFD	append auto-form-feed
13	SLIN	selection input
14	PE	paper empty
15	ERR	error
16	BUSY	busy
17	SLCT	select
18 – 25	GND	ground signal

Power Supply:

The Multi-Prommer needs a power supply of 230V AC with a tolerance of $\pm 15\%$. The connection should be made with the delivered cable. The Multi-Prommer is also reachable with 115V AC, ask your dealer.

Software-installation:

Download the WinPromm-software from the mentioned website and start the installation. Follow the Install-Shield.

Menu-structure:

File	New
	Open
	Save
	Save As
	Printer configuration
	Exit
View	Toolbar
	Status line
Module	Select
	Read
	Write
	Write too
	Blanktest
	Compare
	Block list
	Erase
Configuration	Interface
	Language
	Word/Block
	SYSID
	Display checksum
Window	Overlapped
	Side-by-side
	Top-on-top
	Group symbols

Help	Contents
	Usage of help
	Introduction
	Version-history
	About WinPrommer
Block	All
	None
	Exchange

File-formats:

.	All Files. It is tried to choose a file-format according the extension. If no appropriate file-format is found, the binary format is used
*.BIN	Binary File
*.S5D	Step-5 File
*.S7P	Step-7 File (structure)
*.308	ET-100 File
*ET.200	ET-200 File
*.2BF	ET2-Binary Export
*.HEX	Intel-Hex-Format
*.EPR	Motorola-Hex-Format
*.525	CP-525/524 Files
Q*.*	CP-5431 File
A*.*	CP-1430/CP-143 File

Technical data:

Size (S x H x D):	245 x 47 x 187mm
Case-Type:	metal casing, powder-coated

For more Information of the Multi-Prommer or to get the actual Manual or the actual operating software WinPrommer, you find the information under

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>
Copyright by PI 2003 - 2024

Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + Memory modules / Prommer
 - + MULTI-PROMMER



Please make sure to update your drivers before using our products.

Detect failure of Profinet-devices



Identify devices that are likely to fail in the near future.
Detect defective devices that no longer respond to PN protocols.
Defective devices are reported by email and logged.
No long troubleshooting thanks to exact station information.