

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.  
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

### **Menutree Website:**

- + Products / docu / downloads
- + Accessories
- + Prolongation-Sets
- + PG-UNI lengthening set




### **QR-Code Website:**



Please make sure to update your drivers before using our products.


## Insensible communication with the S5-PLC

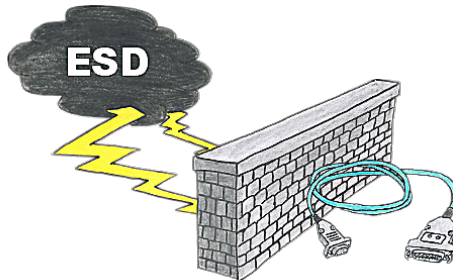

Safe communication with the S5-PLC in an environment of radiant-converters and motor-controls. Electrostatic-charging is also a KO-criterion for operation of interface-cable, a discharge and the interface-product is damaged or even defective.


PG-UNI-II is prepared for this, with its full-metal-cast-housing and ESD-proof components it offers the best protection against such influences. The shielding of the cable connected to the metal-housing is the solution. Of course, the cable can be extended to a TTY-distance of up to 300m, using of adapter for PG-UNI-cables is also possible.

## Recognize missing Profinet participants




Recognize cable breakage, contact problems and line faults.  
Retransmissions and failures are logged and reported.  
Early acting before total failure of the participant.

## LAN-subscriber to the WiFi

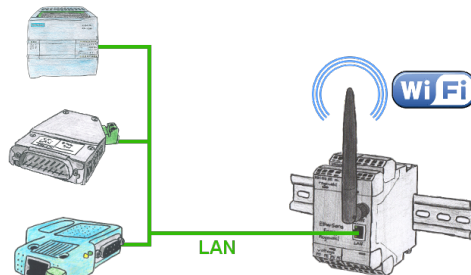

You also need to network devices but don't have locally no ethernet-cable. Wifi is available? With the EtherSens-Bridge you bring immediately all connected wired participants in the WLAN network.


## Interface for Mitsubishi Melsec Fx- & A-series



Changes to Mitsubishi PLCs but no interface cable?

Use the SC09 cable to connect the PC to the Mitsubishi MELSEC FX & A series. Any PLC with an RS-422 interface can be connected. Including adapter cable for 8-pin DIN connection, firmly attached so that it can never be forgotten. One cable for both types, universal to the Mitsubishi PLC.

## Profinet life cycle monitoring



Identify impending failures in your Profinet.  
Creeping aging will be displayed to you very detailed.  
The Profinet-Watchdog give you the change to react before something happens.

## WIFI not allowed, what now?



You may not use WIFI in your environment?  
Connect the USB-ETHERNET-adapter to the ProfiNet-WATCHDOG's USB-port and  
create another Ethernet-socket.  
Connect your PC directly with LAN-cable to the ProfiNet WATCHDOG.