

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Accessories
- + Adapter for s5-interface
- + Monkey-swing



QR-Code Website:



Please make sure to update your drivers before using our products.

To switch a MESSI-output via SMS




SMS-Versenden.
PASS=12345 DO1=1,15

```
PASS=12345 DO1=1,15
| | | | | 15 Sekunden Schaltzeit (0 bedeutet dauernd an)
| | | | | 1 - EIN, 2 = AUS (bei AUS wird keine Schaltzeit beachtet)
| | | | | DO1 Schaltelevort für Digitalausgang (DO1 bis DO8 möglich)
| | | | | Passwort aus dem Menüpunkt Geräteeingang
| | | | | Schaltelevort für Passwort
```

Switching an output via SMS is an integrated function of the MESSI. Herewith the switching operation will be secure and comprehensible from afar.

PLC coupling (data exchange between PLC's)

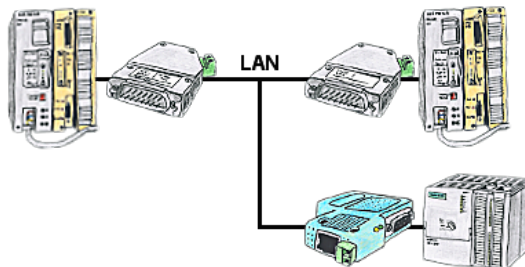

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Therefore no dedicated line is required, it's sufficient when the stations connect via network (DSL-router).

Worldwide access



No matter where you are, access to the EtherSens-device and its web-interface is available from everywhere.

Move around the machine wirelessly




Controlling/monitoring all around the machine with a PC => nobody has such a long cable with them

Move around the machine without fear that the cable will be too short or someone will run over it and damage it. Always ONLINE and intervene at the appropriate moment or trigger a circuit-breaker/button and observe the reaction of the machine, always ONLINE via WIFI on the machine.

LAN-WIFI-conversion solves all problems and possible dangers

Direct Voice-speech-output with MESSI NG 3G

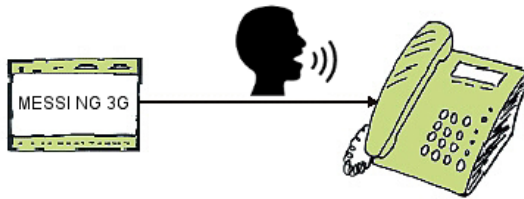


Transmission of fault messages as a voice message to several participants

MESSI NG 3G can send stored-voice-messages to specific recipients depending on the defined input and signal status. To do this, the specified phone-numbers are called according to the phone-number-plan and then the digitized voice-message is transmitted.

Depending on whether the message has been acknowledged or not, the next participant in the numbering-plan will be informed.

Let yourself for example, giving water-levels over the phone, MESSI NG 3G will do this for you.

Data backup S5-PLC on SD-card



S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on SD-card