Under the web-address https://www.process-informatik.de are product specific
documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de
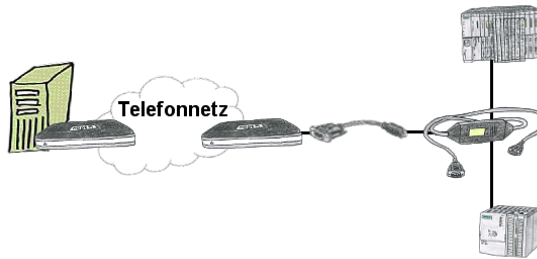
Menutree Website: **QR-Code Website:**

+ Products / docu / downloads
    + Accessories
   + Various PLC-/Panel-connection-cable
            + PG685 cable

Please make sure to update your drivers before using our products.

Remote maintenance with TS-software without original TS-adaptor

You have to reach urgend your PLC via remote maintenance and have no TS-adaptor in your company? No problem, configure with the MPI-Kabelmanager your S7-interface-cable MPI-II-Kabel the mode "TS" for "remote maintenance", connect this cable with the TS-Adapter (article number 9350-TS) with a standard modem and send it all to your client. Now you will be able to start the connection with your TS-sofware and solve the problem. And this all without buying a original TS-adapter.
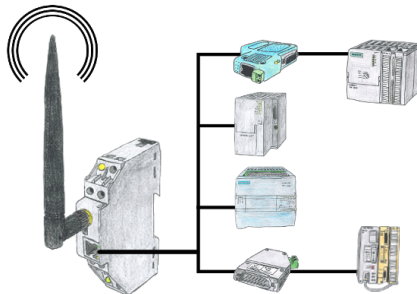
S7-300/400 (MPI/DP) to S5

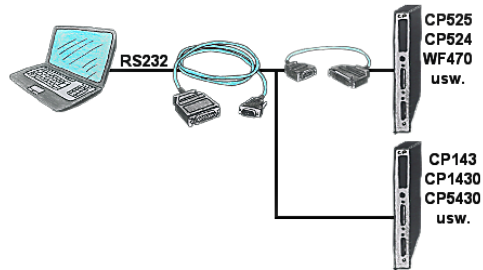Coupling S7-controller with MPI/Profibus at S5-control with PD-port via network

Via digital input triggered DB-backup/-restore without additional PC via PG-socket and
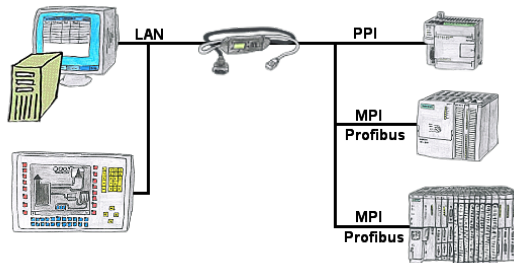Ethernet to FTP-server

You have a variety of LAN products and would like to communicate to them via WLAN?
No problem, with the WLAN-Klemme you will be able to contact all these products.

You have a PC with programming software and a 9pin COM-port as interface? No problem, for this purpose the PG-UNI-cable is exactly the right product. Connect it to a Siemens assembly such as H1-CP (CP1430), WF470 and PC or CP-525 with the CP525-adapter and PC and you're Online.

Watching of S7-PLC-devices via LAN without Ethernet-CP

Your panel only has a LAN-socket as PLC-interface? No problem, connect this socket with the S7-LAN or the MPI-LAN-cable and plug it directly on the PPI/MPI/Profibus of the PLC. Then access to the variables and data of the PLC is already available.