Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH Im Gewerbegebiet 1 DE-73116 Wäschenbeuren +49 (0) 7172-92666-0

> info@process-informatik.de https://www.process-informatik.de

Menutree Website:

QR-Code Website:

- + Products / docu / downloads
 - + Hardware
 - + Programming devices
 - + Programming adapter S5
 - + S5 over RS232
 - + S5toMPI









Please make sure to update your drivers before using our products.

Serial programming of the S7- PLC




With the MPI/PPI-cable you have the ability to access a connected SPC-PLC S7-200 (PPI 9600 Baud and 19200 Baud) as well as S7-300/400 (MPI/Profbus 9600 Baud up to 187500 Baud) via PC serial with up to 115200 Baud for reading respectively writing of data.

Integrated Firewall-protection

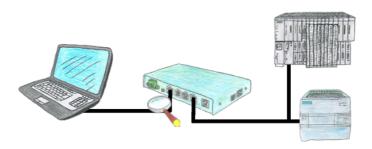


You looking for a device with which you can create a remote maintenance via the Internet without compromising security? No problem, the TELE-Router offers exactly this feature. With the built-in firewall, you can adjust the device completely to your requirements.

Process energy-data with LOGO!



Process of all kinds of the recorded energy-values with the LOGO!-Control

PLC coupling (data exchange between PLCs)



Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices cut the line after occured message.

Remote-maintenance Siemens-S7-PLC with PN-Port



Remote-maintenance of a Siemens-controller with network-connection via secure VPN-tunnel of the TeleRouter

Data backup S5-PLC on USB-stick via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via PG-socket and Ethernet to USB-stick