

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de


<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + Memory modules / Prommer
 - + EPROM-ERASER UVL3



QR-Code Website:




Please make sure to update your drivers before using our products.

Variable-chart without Step7-programming package




You would like to give your customer the opportunity to read current numbers of the manufacturing Online, without installing a visualisation or even the STEP7-package? Then a S7-LAN with the option Status Variable" is needed, and your customer can take a look at these password protected data on a site of the integrated webserver.

Wireless around the ProfiNet-PLC




Move wirelessly around the ProfiNet-PLC and communicate for example ONLINE in the status

S7-1200/1500 to S7-300/400 (MPI/DP)



Coupling S7-controller with PN-port at S7-controller with MPI/Profibus via network

Active on every S5-PLC

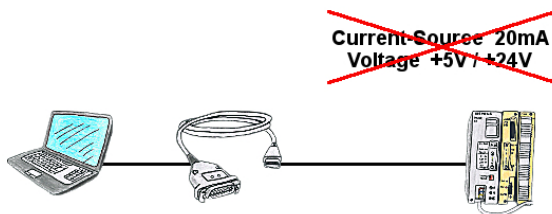


PLC's without current-sources (+20mA) and voltages (5V/24V) at the PG-interface such as the AS511-plug-in card?

The PG-USB-cable does not need anything, it is supplied directly from the USB-socket to which it was plugged. It is active towards its communication-partners, contains its own current-sources.


Universally connected to the S5-PLC without worrying about the supply. Function also given on controls with current-sources/voltages.

Remote maintenance with TS-software without original TS-adaptor

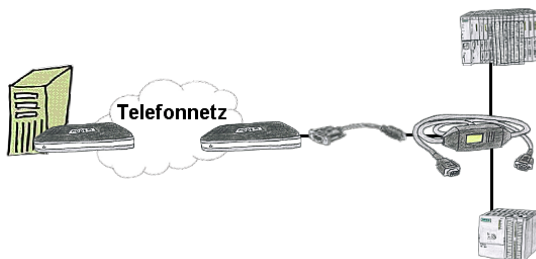

You have to reach urgent your PLC via remote maintenance and have no TS-adaptor in your company? No problem, configure with the MPI-Kabelmanager your S7-interface-cable MPI/PPI-Kabel the mode "TS" for "remote maintenance", connect this cable with the TS-Adapter (article number 9350-TS) with a standard modem and send it all to your client. Now you will be able to start the connection with your TS-software and solve the problem. And this all without buying a original TS-adaptor.

Data backup S7-PLC PN-port on SD-card



S7-PLC triggered DB-backup/-restore without additional PC via PN-port on SD card