Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Menutree Website: **QR-Code Website:**

+ Products / docu / downloads
  + Hardware
    + Remote maintenance
      + S7
        + Internet
          + TeleRouter

Please make sure to update your drivers before using our products.

S5-PLC-diagnosis or signal's doesn't come, but why?


Your installation shows an error and the commissioning engineer isn't available?
 Connect S5-DIAG with the PLC, enter reason of PLC's malfunction (e.g. O32.5 doesn't come) and the device lists all possibilities why the output has not been set.
 So you're able to figure out the problem (e.g. safety door not locked) quickly.
 Finding the cause of the malfunction can be so quick and easy.
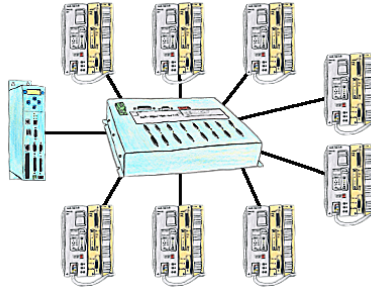
BOSCH-CL <=> S7-TCPIP

Bring your BOSCH-CL control CL200 - CL400 into the network
 Link the PLC with your production-data-acquisition or other Industry 4.0-applications
 Communicate with the controller as if you were talking to an S7-PLC, but the data comes from the CL-PLC
 Networking CL-controllers without much effort (set the IP-address to match your subnet in the module, nothing more)
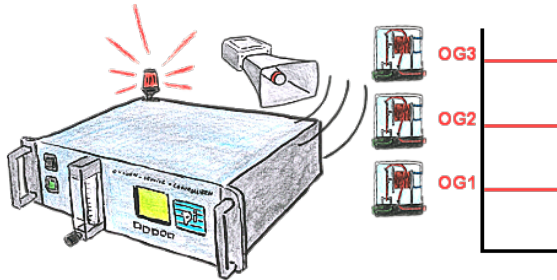
You have many PLC and you want to programm them central on one place? No problem, you have to connect them all to the KOR/MUX-Tele-Switch, connect it with the TP-II and after telephone connect you will be able with the PD-bus-selection of your Step5-software to go ONLINE. Of course the MOR/MUX-Tele-Switch is cascadable, so you can connect up to 30 PLCs to the devices.
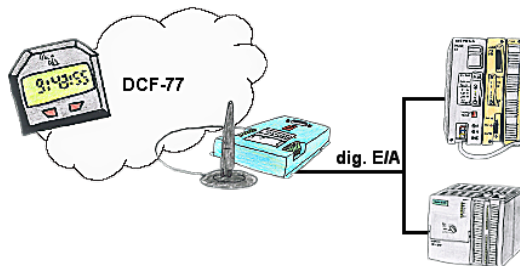
S7-1200/1500 to S7-300/400 (MPI/DP)

Coupling S7-controller with PN-port at S7-controller with MPI/Profibus via network

Free definable limits

You need some limits? No problem, with the OSC-II-devices you will be able to define 3 relay outputs (toggle switch) like UG (down level) or OG (top level) or as a ready-flag (internal probe has working temperature).

Atomic time at the PLC

For your production flow you're always in need of an exact time? No problem, connect the SPS-Clock with 4 digital in-/outputs of your PLC, after synchronisation of the SPS-Clock the updating time can be read in a DB of the PLC.