
Technical data / connection Magnetic base antenna for indoor use

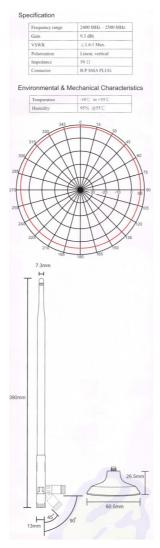

Connection:

Place the antenna base on a metal surface and screw on the rod. Screw with feeling the cable on the device onto the WIFI socket.

Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH Im Gewerbegebiet 1 DE-73116 Wäschenbeuren +49 (0) 7172-92666-0

> info@process-informatik.de https://www.process-informatik.de

> > Copyright by PI - 2025

Menutree Website:

QR-Code Website:

- + Products / docu / downloads
 - + Accessories
 - + Antennas / Accessories
 - + Magnetic base antenna for S5-/S7-BRIDGE / CONNECT






Please make sure to update your drivers before using our products.

DB-Backup/Restore S7-PLC PN-port on USB-stick via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via PN-port to USB-stick

PLC coupling (data exchange between PLCs)



Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices cut the line after occured message.

S7-CP-alternate (without LAN-CP to the PLC)



Do you have a PLC without CP343-1 or CP443-1 and a TP-II as remote maintenance device? Then activate the CP-mode of the TP-II and your visualisation goes directly ONLINE via the LAN of the TP-II.

Wireless around the Beckhoff-PLC



Move wirelessly around the Beckhoff-PLC and communicate for example ONLINE in the status