

Technical data / connection


Magnetic base antenna for indoor use

Specification

Frequency range	2400 MHz - 2500 MHz
Gain	9.3 dBi
VSWR	$\leq 1.6:1$ Max.
Polarization	Linear, vertical
Impedance	50 Ω
Connector	R.P SMA PLUG

Environmental & Mechanical Characteristics

Temperature	-10°C to +55°C
Humidity	95% @55°C

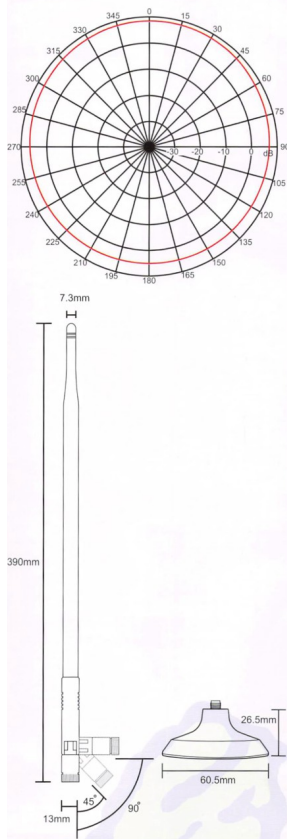

Connection:

Place the antenna base on a metal surface and screw on the rod.
Screw with feeling the cable on the device onto the WIFI socket.

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Copyright by PI - 2026

Menutree Website:

+ Products / docu / downloads

+ Accessories

+ Antennas / Accessories


+ Magnetic base antenna for S5-/S7-BRIDGE / CONNECT

QR-Code Website:



Please make sure to update your drivers before using our products.

Current S7 panels via WLAN to the S5 controller




Connect each S7-TCP-IP panel to your S5.

Now also available via WLAN for mobile workstations.

PARALLEL several panels and even simultaneous PG connections possible.


Include hard-to-reach places in your ERP system.

Failure report transmission released by the PLC

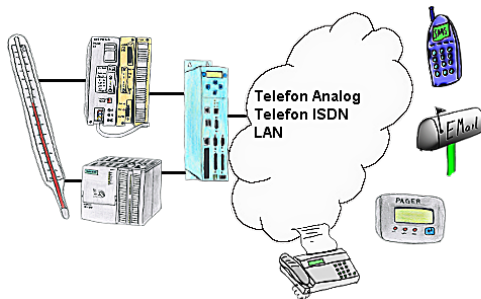

Your outstation reports the current value cyclically, or in case of malfunction the status via FAX, as SMS to your mobile phone, to your pager or also via e-mail.

Simple and uncomplicated remote maintenance

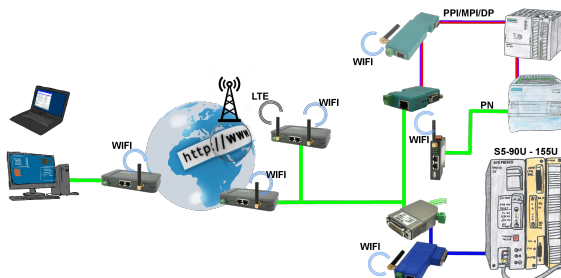


Simple and uncomplicated remote-access to your devices/systems via the Internet VPN-tunnel, registration at any portal is not necessary, activate the device and select and communicate with the opposite system

No great effort to implement access. Use of the devices without consulting IT, no time-consuming commissioning procedure

All your devices in your own cloud, no access from third-party CONNECT-devices to your devices/systems

Universal coupling

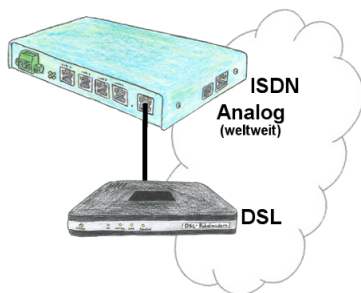

You need a family of devices with which you can solve all your requirements? No problem! With the TELE-router you are able to establish a connection via analog, ISDN or PPPoE (DSL cable modem). The devices are compatible with each other in each case, so that no further additional hardware is needed.