

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Menutree Website:


- + Products / docu / downloads
- + Accessories
 - + Antennas / Accessories
 - + Connection-cable for beam/sector antenna

QR-Code Website:



Please make sure to update your drivers before using our products.

Occupied programming interface => does not have to be

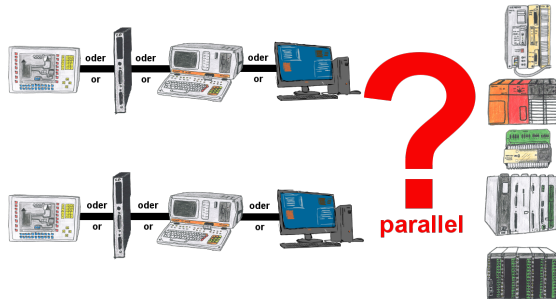


Your Programming-interface of the PLC is already occupied with a panel or PC or communication-processor?

You should accomplish program modifications without removing the other communication-partner? You connect the PLC-specific Multiplexer one-time to the PLC and then connect the communication-partner and also your PC. Now you can work parallel with the PLC without the need of affecting the operation/communication of the panel/CP.


You can even work with 2 programming devices simultaneously, 2x open the same block, only changes which are stored at last will be finally stored in the PLC. Also ideal for trainings purposes if PLC's with IO's are scare goods.

Multiplexer-devices of the PG-MUX-II-family are the ultimate service-device, regardless of what you plug into the two PG-sockets, both participants communicate parallel with the controller.



Via digital input triggered DB-backup/-restore without additional PC via PN-port to SD-card

Active on every S5-PLC

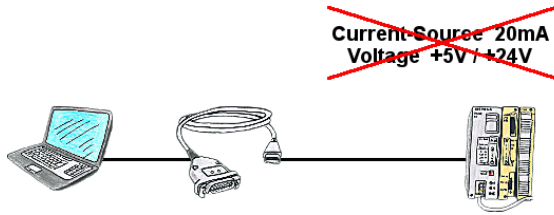


PLC's without current-sources (+20mA) and voltages (5V/24V) at the PG-interface such as the AS511-plug-in card?

The PG-USB-cable does not need anything, it is supplied directly from the USB-socket to which it was plugged. It is active towards its communication-partners, contains its own current-sources.

Universally connected to the S5-PLC without worrying about the supply. Function also given on controls with current-sources/voltages.

Profinet life cycle monitoring




Identify impending failures in your Profinet.

Creeping aging will be displayed to you very detailed.


The Profinet-Watchdog give you the change to react before something happens.

S7-CP-replacement (without LAN-CP to the PLC-device)

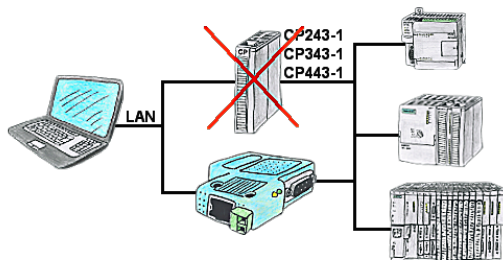

Do you have a S7-PLC-device without CP243-1, CP343-1 or CP443-1 and would like to connect via LAN? Then plug the S7-LAN on the PLC-device and your access via RFC1006 is ready for use.

Link S7-TCP-IP Panel to MPI Profibus over WiFi



Use the latest S7-TCP-IP panels for your MPI / Profibus.
Thanks to WLAN also usable for mobile platforms or cranes.
Connect several nodes at the same time via a network module.
Simultaneous access from different systems possible.