

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + Programming devices
 - + Other interface cables




QR-Code Website:




Please make sure to update your drivers before using our products.

Data backup S7-PLC PN-port on FTP-server via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via PN-port to FTP-server

DB-Backup/Restore S7-PLC PN-port on USB-stick via dig. IO

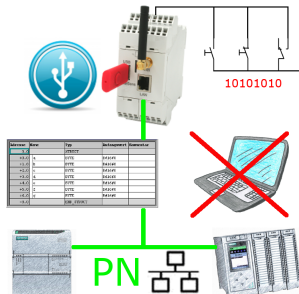


Via digital input triggered DB-backup/-restore without additional PC via PN-port to USB-stick

Message dispatch from the PLC

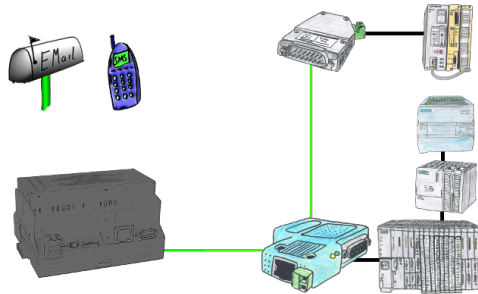


Send directly from your PLC news, statuses, alarms as SMS or email.

Project/history-administration of PLC-programming




Who doesn't know this? When accessing the PLC you find out that parts of the program flow has been changed and none of the colleagues/employees are responsible for it? Therefore install the "option controller" for the PG-2000-software, and every activity of the employees working with the program will be recorded. So you can identify the one employee very quickly and changes are ex post comprehensible, too.

Energy-data acquisition

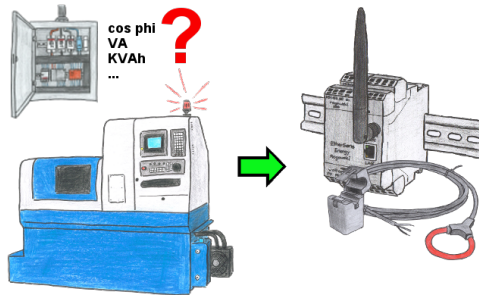

Do you also need the energy-consumption of your plant or need to determine the cos phi? With the EtherSens Energy you can capture and record by using a Rogowski-coil or folding-core the required values.

Universal network-administration

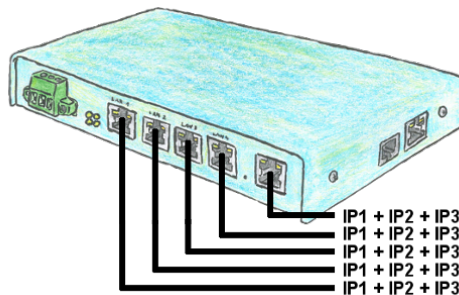

You need to remote maintenance multiple networks simultaneously and your existing switch / router does not have that many ports? No problem, with the TELE-Router you are able to assign up to 3 IP addresses to each LAN / WAN port, so you can communicate with the various segments and networks.