

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Hardware
 - + Memory modules / Prommer
 - + Memory-modules




QR-Code Website:



Please make sure to update your drivers before using our products.


Interface switch for the S5

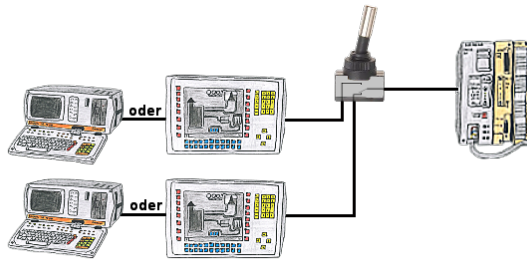

PG-interface of the S5-PLC occupies with a panel and program changes in the controller should be performed? No desire/leisure/possibility to plug permanently between panel and programming-device?

Connect the device from the PG-switch-series to the S5-PLC as well as panel and programming-device, and you decide who from the two participants (PANEL or PG) with the control communicates. Whether with toggle-switch (PG-SWITCH) or with 24V DC (PG-SWITCH-II) or permanently connected by preceding [PANEL and PLC permanently connected, communication is running; As soon as PG is plugged into PG is also switched; disconnect PG and panel has access] (PG-SWITCH-III), switching to your requirements and no permanent change.

Connecting S7-PLCs without head-station




Direct data-exchange between S7-PLCs with S7-LAN.

Thanks to active PUT/GET directly in the module without superordinate head control!

Transfer data directly from one MPI/Profibus-PLC to another.


Bus independent! MPI-bus Profibus / Profibus Profibus / MPI-bus MPI-bus

Data backup S5-PLC on FTP-Server



S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on FTP-server

Capture data and control independently

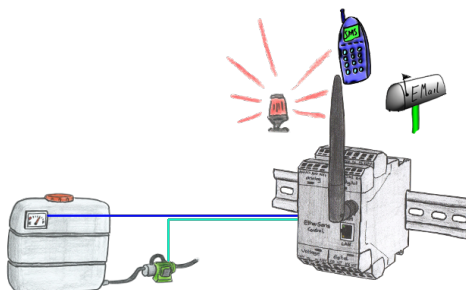


Apply small control tasks of your systems with EtherSens-Control-devices. Determine switching points where the device is running to respond. Depending on the parameterization, an email or SMS notification (depending on the device-configuration) or the device automatically controls via the optional IO-modules (analog / digital / relay).

Remote-maintenance Siemens-S7-PLC with PN-Port with firewall



Remote-maintenance of a Siemens-controller with network-connection via secure VPN-tunnel and scalable firewall

Data backup S7-PLC over MPI/Profibus on USB-stick via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to USB-stick