

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de

<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Accessories
 - + Connection cable / adapter
 - + TTY
 - + TD-OP-cable



QR-Code Website:




Please make sure to update your drivers before using our products.

Variable-chart without Step7-programming package



You would like to give your customer the opportunity to read current numbers of the manufacturing Online, without installing a visualisation or even the STEP7-package? Then a S7-LAN with the option Status Variable" is needed, and your customer can take a look at these password protected data on a site of the integrated webserver.

Wireless around the ProfiNet-PLC




Move wirelessly around the ProfiNet-PLC and communicate for example ONLINE in the status

Wireless around the Schneider-PLC



Move wirelessly around the Schneider-PLC and communicate for example ONLINE in the status

Profinet WLAN panel connection



Simply connect your panel to your Profibus via WLAN.
Mobile workplaces are optimally connected.
You will be able to link additional applications such as PDs, visualizations or ERP systems at the same time.

S7-PLC over RS232




Communication with S7-PLC via RS232 (COM-port), just how and with what?

Data-communication with S7-PLC from PC or other devices via RS232, which interface is required. Questions you don't have to worry about. With "S7 over RS232" you get the right interface-products for PPI, MPI and Profibus.

Which one you use then is up to you.

Free definable limits

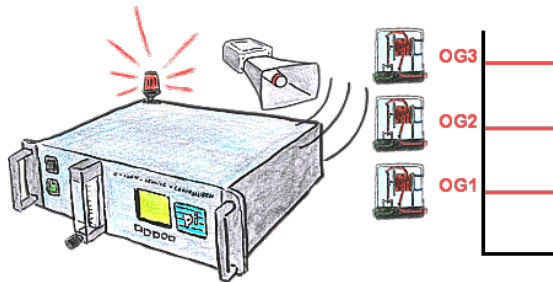

You need some limits? No problem, with the OSC-II-devices you will be able to define 3 relay outputs (toggle switch) like UG (down level) or OG (top level) or as a ready-flag (internal probe has working temperature).