

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.

If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

**Menutree Website:**


- + Products / docu / downloads
- + Hardware
  - + Programming devices
  - + Programming adapter S7
  - + WLAN/WIFI
    - + WLAN/WIFI-SETs
    - + S5/S7-BRIDGE-WIFI-sets

**QR-Code Website:**




Please make sure to update your drivers before using our products.

## Data backup S5-PLC on SD-card




S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on SD-card

## Doubling of PPI/MPI/Profibus-interface without bus-connector

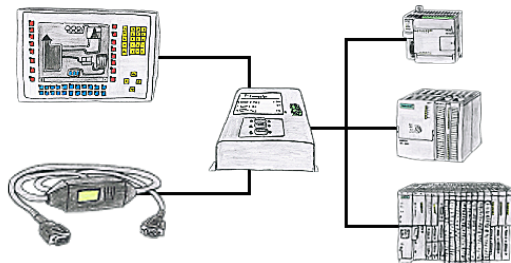

Do you have a single control with panel in use and have to accomplish a little modification in the control program? No problem, plug the T-Connector on the PLC, the panel and PC to the device and then both participants can work with the PLC without annoying bus-cable tapering and interconnections.

## Connecting S7-PLCs without head-station

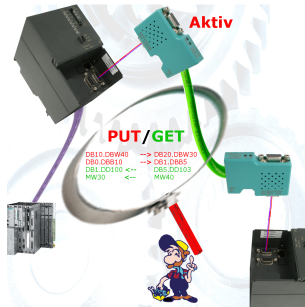


## Direct data-exchange between S7-PLCs with S7-LAN.

Thanks to active PUT/GET directly in the module without superordinate head control!

Transfer data directly from one MPI/Profibus-PLC to another.


Bus independent! MPI-bus Profibus / Profibus Profibus / MPI-bus MPI-bus

|   |
|---|
| PLC coupling (data exchange between PLCs) |
|---|

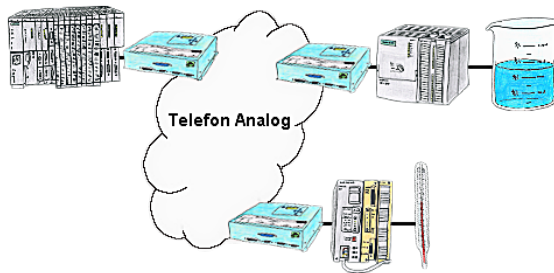


Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices hangs up the line after occurred message.

## Integrated WebServer

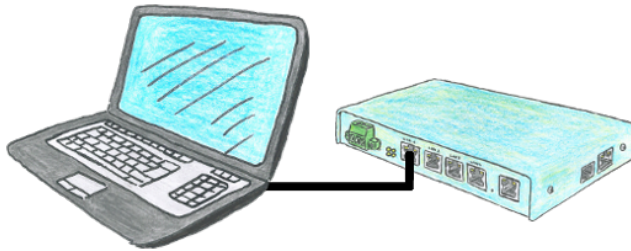

You would like to use a device that is small and handy and reasonably parameterizable yet? No problem, with the TELE-Router you fulfill all these requirements. The device is parameterizable via an integrated web server, connections self-explanatory.

## LAN-subscriber to the WiFi

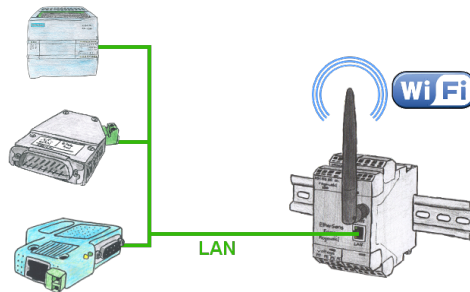

You also need to network devices but dont have locally no ethernet-cable. Wifi is available? With the EtherSens-Bridge you bring immediately all connected wired participants in the WLAN network.