Handling-Shortinstruction V1.0 for

CONNECT-IP-Switch

Connectors:

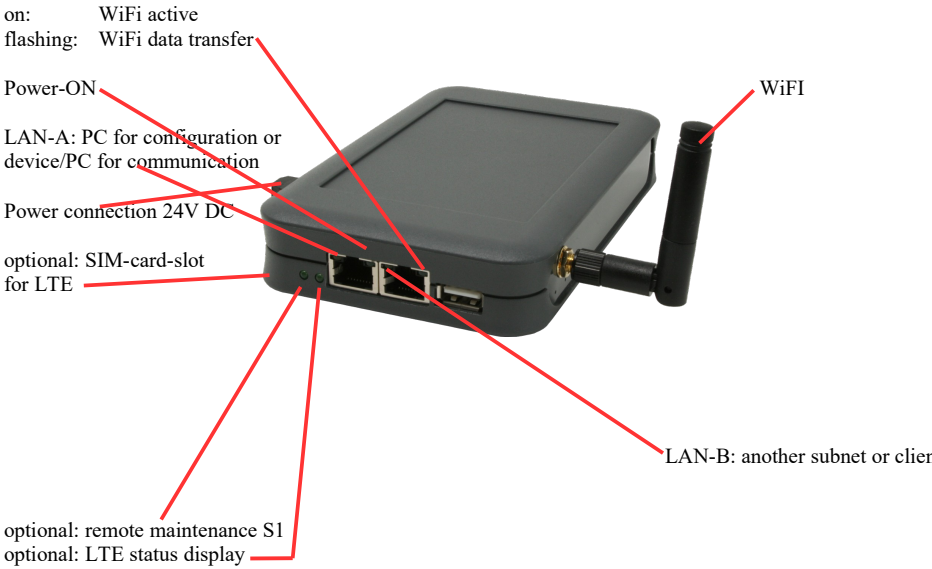

Power connection :

Voltage:	24 V DC ± 20%
power consumption :	1,2W

Assignment of voltage plug :

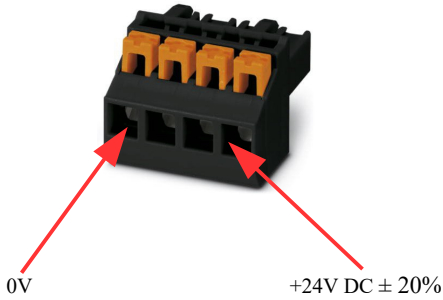

Initial start-up:

- CONNECT-IP-Switch creates a WLAN network with an SSID „CONNECT WiFi“ with active DHCP master (laptop is automatically assigned an IP address)
- Connect laptop to this WiFi network and open with browser webserver with IP: http://192.168.2.1

or

- Connect the PC to the LAN port using a LAN cable
- PC must be in the 192.168.2.xxx subnet

Starting page:

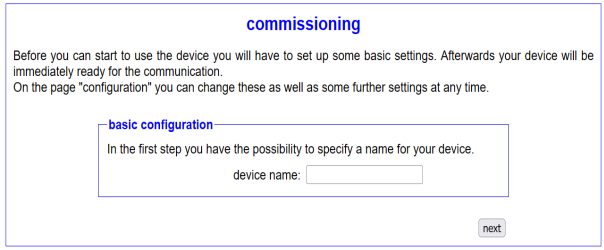

Basic configuration:
Assign a name to the device for identification

Connection to company network:

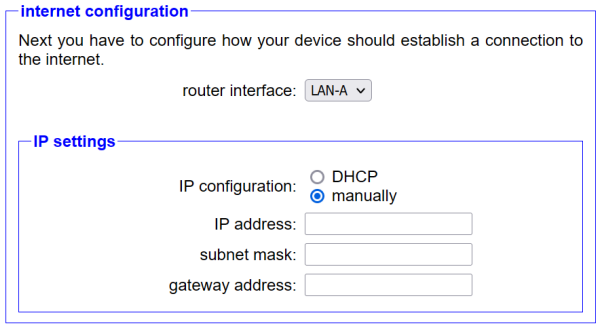

Internet-configuration:
Determine the interface to which the target network is connected

IP settings:

- IP-configuration:	DHCP (Parameters come from a DHCP master on the network) Manuell (IP address + subnet mask fields must contain valid values)
- IP address:	IP address of the device
- subnet mask:	Subnet mask of the device
- gateway address:	Gateway address of the device

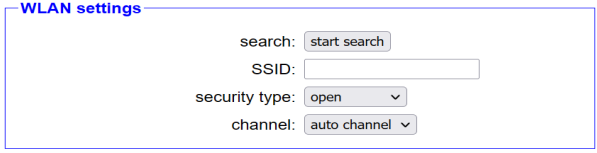

WLAN settings:

- Search:	Searches for accessible WiFI networks and lists them. By clicking on an entry, the selected WiFi network is used for connection	
- SSID:	Name of the connected or created network	
- security type:	Open	(no encryption)
	WEP	(either 5 or 13 ASCII/10 or 26 hexidecimal characters)
	WPA	(8-64 ASCII characters)
	WPA2	(8-64 ASCII characters)
	WPA/WPA2	8-64 ASCII characters (Independent automatic selection whether WPA or WPA2)
- channel:	Selection of the connection channel	

Peripheral configuration:

Interface: Determine the interface that is to be connected to the machine network

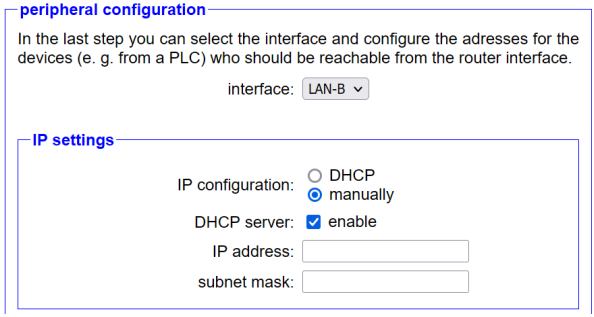

IP settings:

- IP configuration: DHCP (Parameters come from a DHCP master on the network)
  Manuell (IP address + subnet mask fields must contain valid values)
- DHCP-Server: Device is a DHCP server on the selected interfaces
- IP address: IP address of the device
- subnet mask: Subnet mask of the device

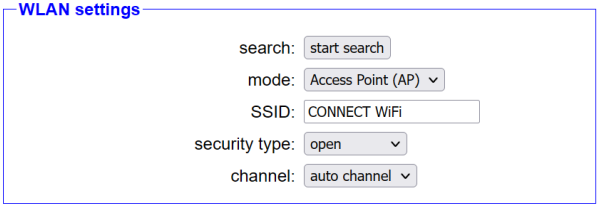

WLAN settings:

- search: Searches for accessible WiFI networks and lists them; by clicking on an entry, the selected WiFi network is used for connection
- mode: Access-Point (AP) [the CONNECT-IP-Switch opens its own WiFi]
  Client [the CONNECT-IP-Switch connects to an existing WiFi network]
- SSID: Name of the connected or created network
- security type: Offen (no encryption)
  WEP (either 5 or 13 ASCII/10 or 26 hexidecimal characters)
  WPA (8-64 ASCII characters)
  WPA2 (8-64 ASCII characters)
  WPA/WPA2 8-64 ASCII characters (Independent automatic selection whether WPA or WPA2)
- channel: Selection of the connection channel

IP-Switch configuration:

Determine the IP addresses or IP address ranges that are to be converted from the machine network into the company network.

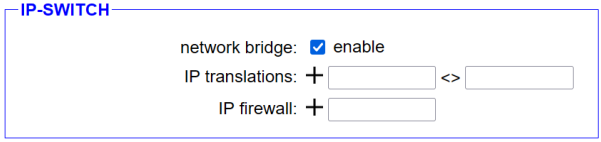

- network bridge:	With this option, all IP packets from the company network to the machine network and vice versa are pushed through the CONNECT-IP switch, except for the packets for IP address translation is registered. This option must be deactivated to ensure strict separation of the machine network and the company network!	
- IP translation:	left field:	IP address from the machine network that is to be implemented
	right field:	Converted new IP address from the company network
	The line is accepted with the + symbol and further conversion can be entered	
- IP firewall:	Here you determine whether and which IP addresses from the machine network are allowed to communicate with the company network	

After selecting the configuration, save it in the device and after a short initialization time (max. 10s) the devices are ready for operation.

You can find out more about the operating modes in the device manual on the CONNECT-IP switch product page

Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Copyright by PI 2024 - 2026

Menutree Website:

+ Products / docu / downloads
  + Hardware
    + Remote maintenance
      + S5
        + Internet
          + CONNECT devices
            + CONNECT-IP-Switch

QR-Code Website:

Please make sure to update your drivers before using our products.

Integrated firewall

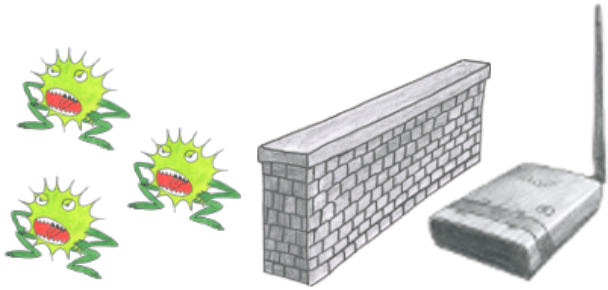

You use ALF as a WLAN-router to connect your PC with the internet. No Problem, this Sie nutzen ALF als WLAN-Router um Ihren PC ins Internet zu bringen. Kein Problem, ALF masters this task without problems. Its built-in firewall ensures that no hacker from outside changes your configuration or moves in your network.

Wireless around the Bosch-PLC

Move wirelessly around the Bosch-PLC and communicate for example ONLINE in the status

Logging and analysis of communication data

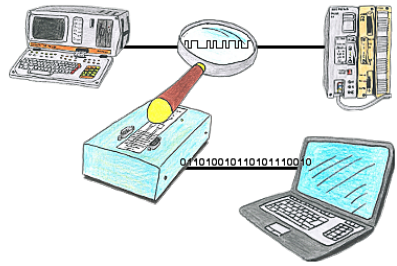

You want check,why your application cant communicate with the PLC or why after some time past the communication will be broken? No problem, integrate the PG-FOX-hardware in this communication way and log through the PG-FOX-software on an PC the sended data in the exact time. So, you can later check the date and find a solution of the problem.

Actual time for the PLC?

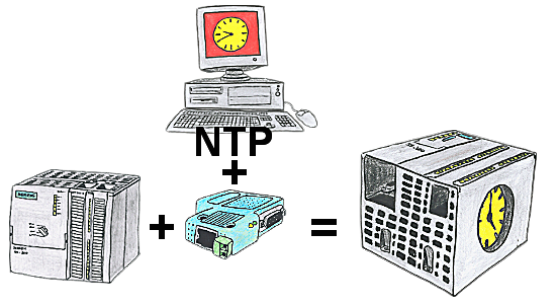

You need in your PLC a actual time? No problem, with the NTP-function the S7-LAN-module get from a NTP-(Time-)Server the actual time and transfers it direct into the configured PLC or for processing in a DB.