Under the web-address https://www.process-informatik.de are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Menutree Website:

+ Products / docu / downloads
  + Hardware
    + Analysis technic
      + Oxygen-Service-Controller PS
        + Oxygen-Service-Controller PS ZP19

QR-Code Website:









Please make sure to update your drivers before using our products.

Data backup S7-PLC over MPI/Profibus on FTP-server



S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on FTP-server

Interface-products for S5-PLC

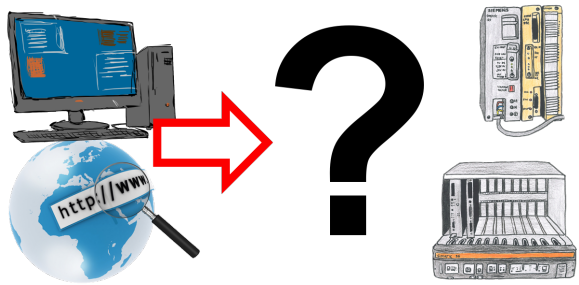


Communication with S5-PLC, just how and with what?

Data communication with S5-PLC from PC or other devices, which interface fits on/to my controller. All questions you don't have to worry about. With "Programming adapter S5" you get the right interface.

Select the interface of your PC or device (serial via COM-port, USB, Ethernet (network), WIFI) and you will be shown the possible products.


Which one you use then is up to you.

Extension of a 3964R-line via LAN

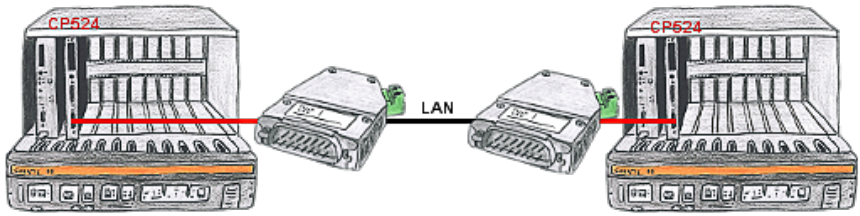

There is a control with CP524 in your outstation and the communication partner of the CP has moved locally. Connecting path is a LAN-network. So each of both participants gets a 3964R-LAN and after input of the partner's IP-address a coupling via LAN will be configured.

Save time and money




Connect panel to PLC or PLC to PLC, why waste time and money unnecessarily?
Get an expensive bus-cable, screw the bus-connector and also make the classic mistake in the wiring (shield-connection to bus-line). Why all this effort when there is a ready-made solution:

MPI/Profibus-connection-cable with a length of 1m, cast D-Sub-housing with screw-bolts. Only the signals A + B (bus itself), ground and RTS-AS are 1to1 applied, so no problems with possible voltages, compensating currents.


Simply plug it on to the MPI- or Profibus-interface, screw it on and communicate.

Linking of S5-PLC’s without modifying the PLC-program

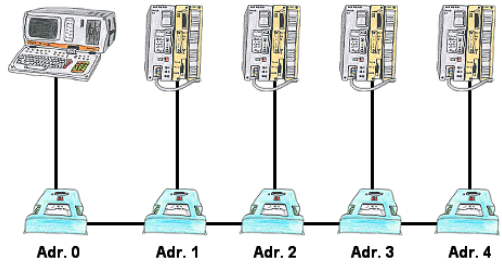

You have to link several S5-PLC's so that in case of need you can respond to all of them without modifying the PLC-program? No problem, connect all PLC's that are in the run with the IBX-Klemme, set up the respective address (1 to 30) at the IBX-Klemme and with the address 0 you will be able to respond to all PLC's via PD-bus-path selection.

S7-1200/1500 to S5



Coupling S7-controller with PN-port at S5-controller with PD-port via network