

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

info@process-informatik.de


<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Software
 - + Programming-software PG-2000 Step5 & Step7
 - + Complete package



QR-Code Website:



Please make sure to update your drivers before using our products.

Profinet-monitoring/-diagnosis inclusive alarm-messages



Detect intrusions and anomalies on your ProfiNet.
Early detection of malfunction and failures and malfunctions.
Easy installation, plug and play double socket.

Sensor-networking 4.0

Siemens S5
Read / Write
IO-Schnittstelle



Siemens S7
Read / Write
PPV / MPI / DP






Energieanalyse
(Ein-Slot-1 bis Six-Slot-3)
EtherSens "Energy"
L1, L2, L3, N-Echtzeitanalyse
bis 8000 Messungen / Sek
Spannungen bis 800 VAC
Strome über 1000 A
Hz / cos phi / Leistungs-factor
Watt / Blind / Scheinleistung MW
Energieverbrauch kWh




Alle Messgrößen
U / I / °C / Q2 / H2O, m, kg, mm ...
—
Echtzeitanalyse, Überwachen, Alarmieren
zentral protokollieren + beobachten

Vorhandene Sensoren direkt einbinden
analoge und digitale Ein-Ausgänge
elektrisch und Messkurve frei konfigurieren
Messgrößen einfach über WEB eingeben
Klick-Montage auf Standard-Hutschiene
Stromversorgung 220VAC / 24VDC

Integrierter Webserver
Zugriff auf alle Sensoren im Netz


Protokoll auf SD-Karte + FTP-Server
in verschiedenen Datenformate
bei Grenzwert-Alarm -> Ausgänge über Netz

Data backup S7-PLC over MPI/Profibus on SD-card via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to SD-card

Integrated WebServer

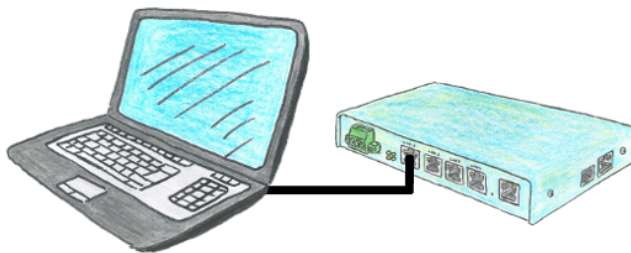

You would like to use a device that is small and handy and reasonably parameterizable yet? No problem, with the TELE-Router you fulfill all these requirements. The device is parameterizable via an integrated web server, connections self-explanatory.


Serial communication with S5-PLC (CPU-assemblies 15pin)



S5-PLC communication from PC with serial COM-port and your programming package?

PG-Com-cable up to a length of 15m are the appropriate interface-product. Without special accessories, without external supply, plugged on PC and S5 PLC and work immediately. Connection with original Siemens-sliding-locking to S5-PLC, with screw-bolts on the PC. Function with S5-90U to S5-155U. Connection PLC-side 15pin, PC 9pin (adaptation to 25pin at any time possible).

Operation as a WLAN-client

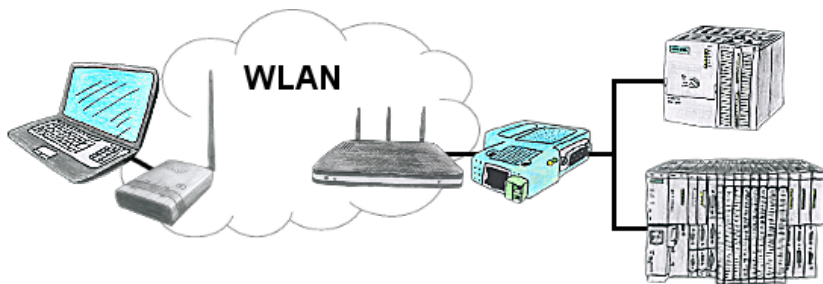

You are on site your plant and should move round the machine and simultaneously control or monitor. WLAN is reachable, but your PC is not able to provide WLAN. No problem, you parametrize ALF as a client and connect him to the PC and join the reachable WLAN and you are online on the PLC.