

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Hardware
- + Remote maintenance
- + S7
- + Analogue-telefone
- + MPI / PPI - Profibusmodem




QR-Code Website:



Please make sure to update your drivers before using our products.

Data backup S5-PLC on SD-card via dig. IO



Via digital input triggered DB-backup/-restore without additional PC via PG-socket and Ethernet to SD-card

Detect and alarm Profinet burglary




Detection and logging of unauthorized access in the defined Profinet

Attempted break-ins and access to the network are recognized immediately and e.g. reported by email

Logging of all accesses in the network for historical processing


Possible data-storage USB-stick or FTP-server via USB-network-stick.

Variable-chart without Step7-programming package

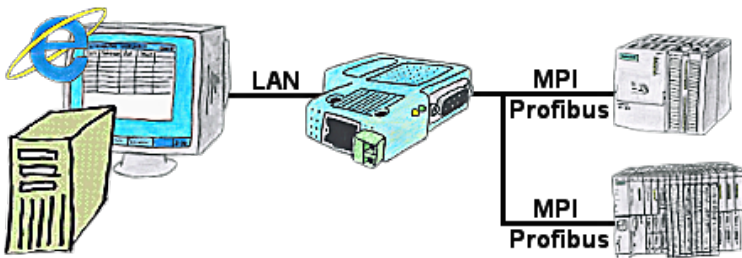


You would like to give your customer the opportunity to read current numbers of the manufacturing Online, without installing a visualisation or even the STEP7-package? Then a S7-LAN with the option Status Variable" is needed, and your customer can take a look at these password protected data on a site of the integrated webserver.

Data backup S5-PLC on FTP-server via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via PG-socket and Ethernet to FTP-server

Standalone recording

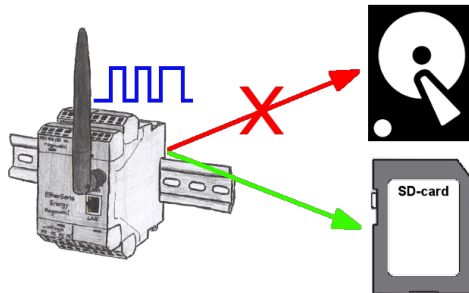

With the integrated SD-card-slot you back-up the recorded data in the device and don't need an external memory. Nevertheless you can send additional the data via FTP to a FTP-server.

PLC coupling (data exchange between PLCs)

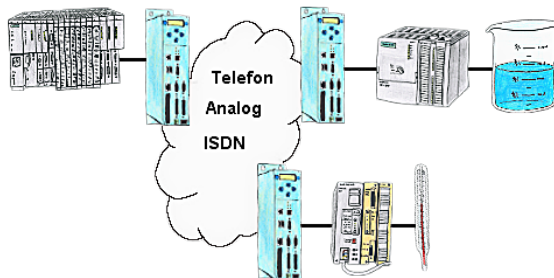

Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, a "normal" telephone connection is sufficient because the devices cut the line after occurred message.