Under the web-address https://www.process-informatik.de are product specific
documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

**Menutree Website:**        **QR-Code Website:**

+ Products / docu / downloads
  + Accessories
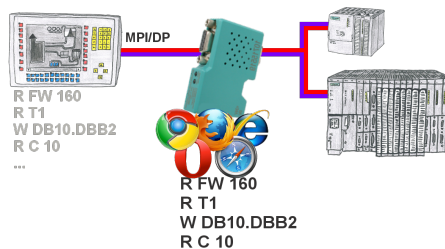    + Various PLC-/Panel-connection-cable
     + S5-cable

Please make sure to update your drivers before using our products.

| Wireless around the machine with LAN-port |
| --- |



Move wirelessly around the machine with LAN-port and communicate for example ONLINE in the status

| Analyzing of write-/read-accesses to the PLC |
| --- |



Panel of S7 SPS, no backup of the project or the projecting-data itself?
 Put the MPI/DP-bus-communication-analyzer on the bus of the respective control, set the bus-address of the control via the web-interface and start the recording. After stop visible list in the web-interface of all read or written data-areas I/O/F/T/C/DW of the control.
 Filter functions for source-address as well as source- and target-SAP.

S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on FTP-server

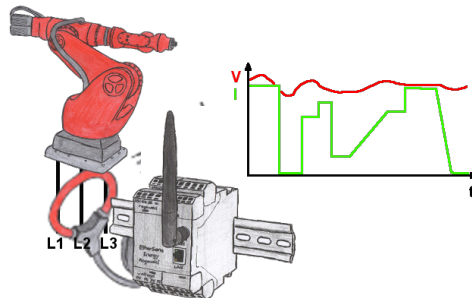Without LAN-cable round of the PLC



Your're right in the middle of your production line and and should move around the machine and simultaneously observe / manage. No problem, you parameterize the S7-WLAN-Bridge, connect to the MPI-LAN and connect to an access-point or with the ad-hoc-network of your laptop and are ONLINE on the PLC.

| Connect MPI / Profibus with current network panels |
| :---: |



Visualize with the latest S7 network panels directly on your MPI Profibus.
No PLC change necessary.
Connect several nodes at the same time via a network module.
Simultaneous access from different systems possible.

| Detect unnecessary idling |
| :---: |



Detect the efficiency of your plant/machine by EtherSens-Energy-devices. Log the preset parameters and evaluate them then later. Find so unnecessary idle-times and increase so the efficiency.